

MBM 408A


Dependable automatic folder that comes pre-programmed with 36 standard folds. Up to 12 custom jobs can be stored in memory.



Specifications

Speed, sheets per hour*	Up to 14,400*
Paper size, inches	3 1/2 x 5 to 11 x 17
Paper weight, pounds	12 to 80*
Sheet capacity	500*
Electrical requirements	115 V, 60 Hz
Dimensions (D x W x H), inches	39 3/4 x 21 1/2 x 19 3/4
Shipping weight, pounds	76

*May vary due to variations in paper and power supply

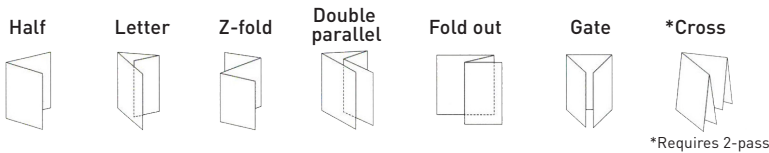

HIGHLIGHTS

- Features automatic folding position setting
- Folding patterns can be stored and recalled via touch screen
- Fastest folding speed in its class
- Perforating/scoring/kiss cut units available by option


Automatic 3 roller friction feed system. Pre-programmed with 36 standard folds. Stores 12 custom folds in memory. Color LED touch screen control panel includes 4 digit addition / subtraction digital counter. Test button folds 2 sheets for inspection. Automatically senses and displays paper size. Extended exit tray for neat stacking of folded sheets. Automatic conveyor ensures smooth ejection of folded paper. Single sheet feeding automatically maintained for different weights of paper. Auxiliary paper guide for cross folding. Load and unload paper from same side. Display alert and audible signal in case of incorrect operation. Skew and micro-adjustment dials. Fully enclosed fold tables for quiet operation. Quick-release roller system for easy maintenance. Optional scoring, micro-perforating, and slitting units.

Features



TOUCH SCREEN

The LED touch screen sets up 36 standard folds automatically at the touch of a button. Up to 12 custom folds can be stored in memory.

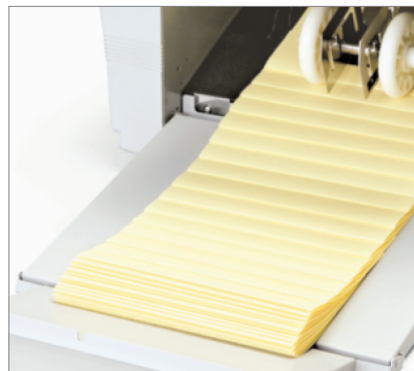

EXTENDED EXIT TRAY

An extra long exit tray ensures neat stacking of finished jobs.



DOUBLE FEED DETECTION

The double feed detection sensor prevents mis-folded papers being contaminated to outputs.



WWW.MBMCORP.COM
TEL: 800-223-2508

Wheeler Business Machines
16 Frontenac Street, SE
Grand Rapids, MI 49548
877-245-3335
sales@wheelermachines.com

All technical data is approximate and subject to change. © MBM Corporation, 3/2017.

